

Administration Headquarters



50,000m² Manufacturing Plant and Logistics Center



AIGI ENVIRONMENTAL INCORPORATED

A Subsidiary of AIGI Industrial Group

Contact: info@aigienviroental.com www.aigienviroental.com



Scan the QR code
to see
more information

AIGI ENVIRONMENTAL INC. inspected this product under experimental conditions. Users shall judge independently whether to use this product, and shall ensure correct storage, installation and application of this product. As such, our company assumes no responsibility with regard to any situation arising from inappropriate storage, installation and application. All products of our company were strictly examined under the relevant national or business standards. Users shall complete checking this product within 30 working days upon receipt of the same. If users discover any problem related to the quality of this product, they shall raise their concerns within the above-mentioned period. If users fail to raise their concerns upon expiration of the above-mentioned period, this shall be treated as full acceptance of the product. Our company guarantees the provision of products of premium quality. Should any dispute arise with regard to the quality of the products, the verification of a third-party authority shall then be required. If any defect in quality is spotted out during inspection upon delivery, our company undertakes to provide a new product of equivalent value. Our company reserves the right to change the manufacturing processes, the materials and sources of the materials without further notification. In addition, our company assumes no responsibility or liability for any unintentional typographical error or omission during printing, or any non-timely update of information. Thank you for your consideration.

J090-2023E3V1.0E

AIGI[®]



SPLIT ROTARY SEALS



For Large Diameter

- Bearings
- Gearboxes
- Fans
- Motors



Introduction

Why Split ?


In today's ever more sophisticated plant environment most bearings are still protected by solid rotary seals, either rubber based or polymeric. When the rotary seal either wears out unexpectedly or simply fails, a common occurrence with rubber seals, the most costly maintenance and operations event occurs, unscheduled equipment shutdown which reduces operational output and drives maintenance costs significantly higher. With the recent introduction of **split rotary bearing seals** the duration and cost of these events can be dramatically reduced because of the very short amount of time required to replace the seal. In most cases the failed seal **replacement time can be reduced by 80%**! Simple and easy to use, split rotary seals can **reduce operational downtime and maintenance costs**.

Why Double Split ?


The latest innovation in rotary seal technology is the introduction of **double split rotary bearing seals**. These seals take the already convenient split seal technology a dramatic step further by not only reducing equipment downtime and production losses but also by actually extending seal life. Double split seal designs provide the same advantages of ease of installation and reduced equipment downtime but also **increase the level of seal performance and dramatically extend seal life**.

Why AIGI's Patented Design ?

AIGI has taken **double split rotary seal design to a new level** with the introduction of its **patented arrowhook™ seals**. These technologies allow for the incorporation of two independent seal surfaces into the design which **dramatically improves sealing performance**. The duo-lock design **improves the overall elasticity of the seal** while the wedge cutting technology **significantly upgrades the integrity of the split joint**. These improvements significantly extend the seal performance, life and range of use for split rotary seals.

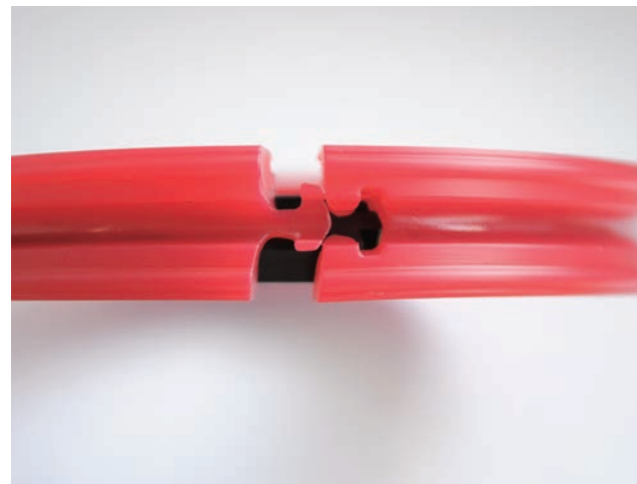

OR: Arrowhook™ Lock

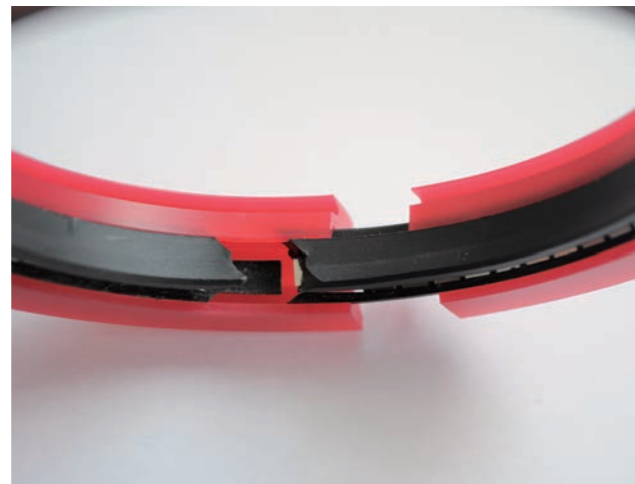

IR: Double Lock


Why do we call it "55" & "05" ?

The double split rotary seal developed by AIGI has engineered splits at 2 locations, 55' and 5' as viewed on a clock face. These precision joints provide double security by maintaining the seal's elastic compensation ability as well as preventing leakage by the Id and OD faces.




Duo-lock at 55' & 5' as viewed on a clock face

★ Arrowhook + ★ 4 Rings + ★ 2 Cuts

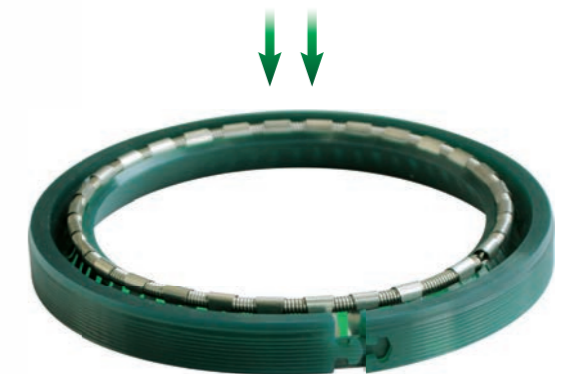

Arrowhook™ - Double split rotary seal

Application

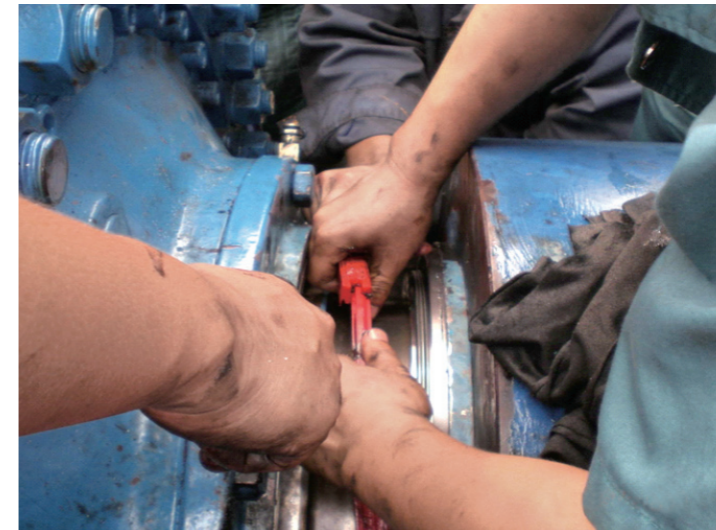



AIGI 5505 Arrowhook™ Series




AIGI 5505
General Application




AIGI 5505H
High Speed Application

Installation Guide

AIGI 5505



1. Open the seal, install it around the shaft



2. Connect and lock it



3. Replace the old seal, making sure the split joint faces upward

AIGI 5505H



1. Open the seal, install it around the shaft



2. Connect and lock it



3. Lock the spring



4. Replace the old seal, making sure the split joint faces upward

Features & Benefits

- Easy & fast installation
- No equipment disassembly required
- Low friction
- Reduces maintenance time by 80%

Design (AIGI 5505H)

- Two Engineered Splits at 55° and 5°
- Ball & Socket Duo-lock
- Inner & outer ring structure
- Unique Ball and Socket Joint Design on OD Ring

Benefits (AIGI 5505H)

- Double Security
 - Maintains Seal's Elastic Compensation
 - No Leakage by the ID and OD Faces
- Creates reactive force to avoid relaxation
- Effective, long life sealing performance
- Duo-Lock split maintains joint integrity in vibrating equipment conditions

Application

- Low run out equipment

Technical Data

| Item | Material | Temperature | Shaft Speed | Run Out |
|------------|-----------|-------------|-------------|---------|
| AIGI 5505 | PU | -30 - 80°C | ≤ 3m/s | ≤ 0.2mm |
| AIGI 5505H | PU / PTFE | -35 - 110°C | ≤ 12m/s | ≤ 0.1mm |

Size Range

| Item | Shaft Diameter-d(mm) | Outer Diameter-D(mm) | Radial Width-H(mm) | Axial Thickness-L(mm) |
|------------|----------------------|----------------------|--------------------|-----------------------|
| AIGI 5505 | d ≥ 20 | D ≤ 400 | H ≥ 10 | L ≥ 11 |
| AIGI 5505H | d ≥ 20 | D ≤ 400 | H ≥ 12.5 | L ≥ 12 |



AIGI 5505 Arrowhook™ Series



AIGI 5505Z

Large Run Out Application



AIGI 5505HZ

Large Run Out & High Speed Application

Features & Benefits

- Easy & fast installation
- No equipment disassembly required
- Low friction
- Reduces maintenance time by 80%

Application

- Larger run out equipment



Technical Data

| Item | Material | Temperature | Shaft Speed | Run Out |
|---------------|----------|-------------|-------------|---------|
| AIGI 5505Z | PU | -30 - 80°C | ≤ 3m/s | ≤ 2mm |
| AIGI 5505HZ-N | NBR | -35 - 110°C | ≤ 10m/s | |
| AIGI 5505HZ-V | FKM | -20 - 160°C | ≤ 15m/s | |

Size Range

| Item | Shaft Diameter-d(mm) | Outer Diameter-D(mm) | Radial Width-H(mm) | Axial Thickness-L(mm) |
|---------------|----------------------|----------------------|--------------------|-----------------------|
| AIGI 5505Z | d ≥ 180 | D ≤ 2000 | H ≥ 15 | L ≥ 15 |
| AIGI 5505HZ-N | d ≥ 180 | D ≤ 1500 | | |
| AIGI 5505HZ-V | d ≥ 180 | D ≤ 580 | | |

AIGI Single Split Rotary Seals



AIGI 522S-PU

AIGI 522S Wedge-shaped Cutting and Spring-energized Patented Technology



AIGI 522S-N

Features & Benefits

- Easy installation & removal
- OD Live-loading tighten Patented Design to make the installation firmly
- Patented reverse wedge cutting and spring-energized sealing technology, providing more holding power in cavity bore
- Less expensive than double split

Application

- Large Diameter, low speed, poor concentricity and large run out equipment

Technical Data

| Item | Material | Temperature | Shaft Speed | Run Out |
|--------------|----------|-------------|-------------|---------|
| AIGI 522S-PU | PU | -30 - 80°C | ≤ 3m/s | ≤ 0.3mm |
| AIGI 522S-N | NBR | -35 - 110°C | ≤ 10m/s | ≤ 0.3mm |
| AIGI 522S-V | FKM | -20 - 160°C | ≤ 15m/s | ≤ 0.2mm |

Size Range

| Item | Shaft Diameter-d(mm) | Outer Diameter-D(mm) | Radial Width-H(mm) | Axial Thickness-L(mm) |
|--------------|----------------------|----------------------|--------------------|-----------------------|
| AIGI 522S-PU | d ≥ 20 | D ≤ 2000 | H ≥ 7.5 | L ≥ 7 |
| AIGI 522S-N | d ≥ 20 | D ≤ 1500 | | |
| AIGI 522S-V | d ≥ 20 | D ≤ 580 | | |

AIGI Patented Split Bearing Protectors



AIGI 322S

Design

- Updated split structure & material
- Non-contact seal
- Waterproof and dustproof

Benefits

- Substitute of traditional labyrinth seal
Easy installation & long seal life
- No shaft damage
- Dramatically extends bearing life

Application

- High speed equipment (not applicable for vertical equipment or grease bearings)



AIGI 322SQ

Design

- Split construction
- Direct bonding to housing face
- Patented self-positioning
- Brass construction
- High temperature rubber


Benefits

- No equipment modification required
- Easy installation
- Automatic alignment
- Safe usage in all plant environments
- Reliable continuous operation

Application

- Reducers, bearing housing and motors (not applicable for vertical equipment)

Installation Guide - AIGI 322S

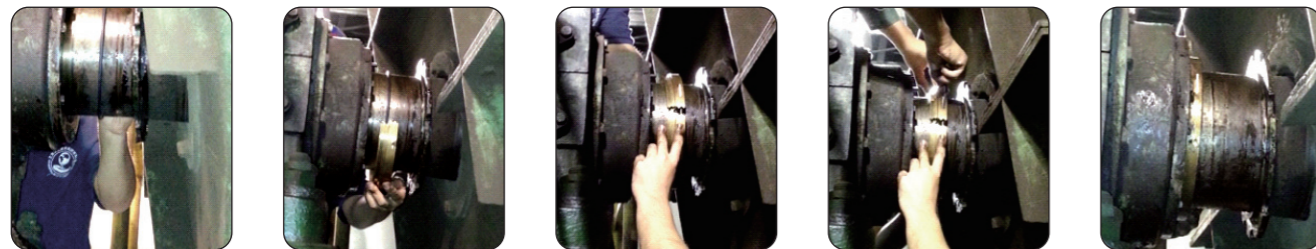

1. Bond and join split o-ring
2. Install bottom half
3. Install top half
4. Tighten Bolts
5. Finish assembly

Technical Data

| Item | Material | Temperature | Shaft Speed | Axial Movement | Run Out |
|------------|------------------|-------------------------------------|-------------|----------------|---------|
| AIGI 322S | Brass/ NBR (FKM) | -35 ~ 120°C (NBR) -20 ~ 200°C (FKM) | ≤ 60m/s | ± 0.4mm | ± 0.3mm |
| AIGI 322SQ | Brass | ≤ 120°C | | | |

In addition to our split rotary seals, AIGI offers a complete line of -

Non-split Rotary Seals

• **AIGI Bearing Protectors**

| Item | Material | Temperature | Shaft Speed |
|---------------------------|--------------------|-------------|-------------|
| AIGI 322A (for oil) | Brass / PTFE / NBR | -35-120°C | ≤ 20m/s |
| | Brass / PTFE / FKM | -20-200°C | |
| AIGI 322B (for grease) | Brass / NBR | -35-120°C | ≤ 12m/s |
| | Brass / FKM | -20-200°C | |



• **AIGI Composite Materials Rotary Seals**



AIGI 522-PU



AIGI 522-N

| Item | AIGI 522-PU | AIGI 522-N | AIGI 522-V | AIGI 522-H |
|-----------------|------------------------------------|------------------------------------|-----------------------------------|----------------------------------|
| Material | PU | NBR | FKM | PTFE |
| Temperature | -30 - 80°C | -35 - 110°C | -20 - 160°C | -20 - 200°C |
| Shaft Speed | ≤ 3m/s | ≤ 10m/s | ≤ 15m/s | ≤ 20m/s |
| Run Out | ≤ 0.6mm | ≤ 0.5mm | ≤ 0.4mm | ≤ 0.2mm |
| Pressure | ≤ 0.3bar | | | |
| Size Range (mm) | d ≥ 20, D ≤ 2000 H ≥ 7.5, L ≥ 7 | d ≥ 20, D ≤ 1500 H ≥ 7.5, L ≥ 7 | d ≥ 20, D ≤ 580 H ≥ 7.5, L ≥ 7 | d ≥ 25, D ≤ 400 H ≥ 10, L ≥ 8 |

Continue

• **AIGI Composite Materials Rotary Seals**

| Item | AIGI 523-PU | AIGI 523-N | AIGI 523-V | AIGI 523-H |
|-----------------|-------------------------------------|------------|-----------------------------------|------------|
| Material | PU | NBR | FKM | PTFE |
| Temperature | -30-80°C | -35-110°C | -20-160°C | -20-200°C |
| Shaft Speed | ≤ 3m/s | ≤ 10m/s | ≤ 15m/s | ≤ 20m/s |
| Run Out | ≤ 0.3mm | | ≤ 0.15mm | |
| Pressure | ≤ 0.5bar | | | |
| Size Range (mm) | d ≥ 20, D ≤ 400 H ≥ 7.5, L ≥ 7.5 | | d ≥ 20, D ≤ 400 H ≥ 7.5, L ≥ 9 | |



AIGI 523
Energized Rotary Seal

• **AIGI Metal-casing Duo-spring Seals**

| Item | AIGI MZG-PU | AIGI MZG-N | AIGI MZG-V | AIGI MZG-H |
|-----------------|-------------------------------------|-------------------------------------|------------------------------------|------------------------------------|
| Material | PU | NBR | FKM | PTFE |
| Temperature | -30-80°C | -35-110°C | -20-160°C | -20-200°C |
| Shaft Speed | ≤ 3m/s | ≤ 10m/s | ≤ 15m/s | ≤ 20m/s |
| Run Out | ≤ 3mm | | ≤ 1mm | |
| Pressure | ≤ 0.5bar | | | |
| Size Range (mm) | d ≥ 180, D ≤ 2000 H ≥ 15, L ≥ 15 | d ≥ 180, D ≤ 1500 H ≥ 15, L ≥ 15 | d ≥ 180, D ≤ 580 H ≥ 15, L ≥ 15 | d ≥ 180, D ≤ 600 H ≥ 15, L ≥ 15 |



AIGI MZG
Energized Mill Rotary Seal

| | |
|---------|--|
| AIGI VA | |
| AIGI VS | |

Material: NBR (FKM is also available)



AIGI V-ring Water Seal

The Most Complete & Innovative Rotary Seal Series

Available To You

