

Alfa Laval TL6

Gasketed plate heat exchanger for a wide range of applications

Introduction

Alfa Laval Industrial line is a wide product range that is used in virtually all types of industry.

The relatively tall plate makes this model suitable for duties with long temperature programs and when high heat recovery is appreciated. A large range of plate and gasket types is available.

Applications

- Biotech and Pharmaceutical
- Chemicals
- Energy and Utilities
- Food, Dairy and Beverages
- Home and Personal care
- HVAC and Refrigeration
- Machinery and Manufacturing
- Marine and Transportation
- Mining, Minerals and Pigments
- Pulp and Paper
- Semiconductor and Electronics
- Steel
- Water and Waste treatment

Benefits

- High energy efficiency – low operating cost
- Flexible configuration – heat transfer area can be modified
- Easy to install – compact design
- High serviceability – easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features, depending on configuration some features may not be applicable:

	Offset gasket groove	Ensures plate utilization for maximum heat transfer efficiency
	Compact frame	Facilitates maintenance and minimizes service area requirement

- Corner guided alignment system
- Chocolate pattern distribution area
- Clip-on gasket




- Offset gasket groove
- Leak chamber
- Compact frame
- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- Lock washer
- Tightening bolt cover

Dimensional drawing

The number of tightening bolts may vary depending on pressure rating.

The height may vary depending on the choice of feet.

Measurements mm (inches)

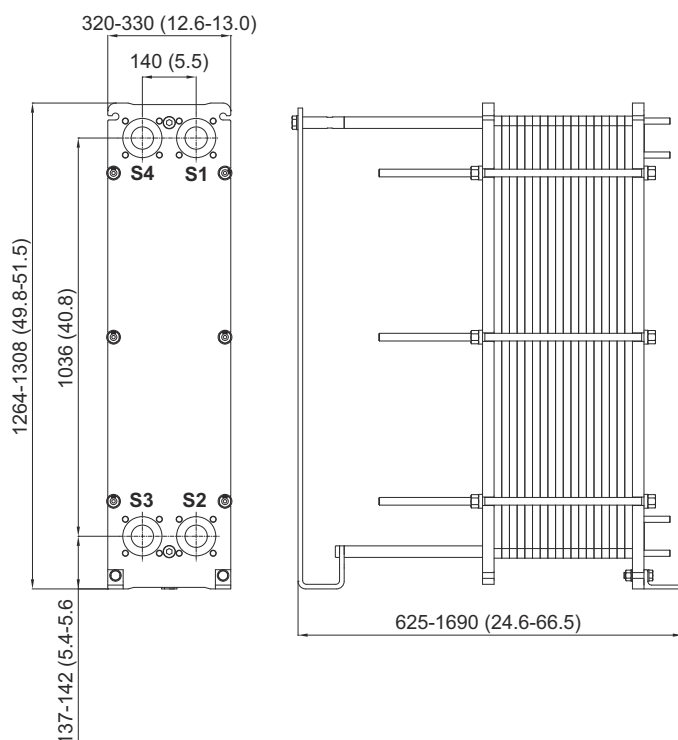

The number of tightening bolts may vary depending on pressure rating.

Technical data

Component	Material
Heat transfer plate, Single plate:	304, 316, Ni
Field gasket:	NBR, EPDM, FKM, HeatSeal
Pipe connections	Stainless steel
Frame plate and pressure plate:	Carbon steel, epoxy painted

Other materials may be available on request.

Operational data

Specification	Value
Pressure vessel codes	pvcALS, ASME, PED
Temperature range °C (°F)	From -50 to +250 (from -58 to 482)
Pressure range barg (psig)	From absolute vacuum to 35.8 (from absolute vacuum to 519.2)

Extended pressure and temperature rating may be available on request.

Flange connections

ASME B16.5, EN 1092-1 and JIS B22220 studed ports are available depending on your pressure vessel code and design requirements. Please contact Alfa Laval for more details.

ASME B16.5 and EN 1092-1 studed ports are available depending on your pressure vessel code and design requirements. Please contact Alfa Laval for more details.

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T9124.1.

Pipe connections

Connection type	Connection standard
Threaded port	ISO 228 - G 2
External parallel threaded	ISO 228 - G 2 B
External tapered threaded	ISO 7 - R 2
Radial grooved pipe	NPS 2
External thread	2 - 11.5 NPT

Other connection types may be available on request.

Accessories

Available accessories for this product:

- Drip tray
- Protection sheet
- Cooling insulation
- Heating insulation
- Counter flange
- Earthing
- Tightening bolt protection

General remarks for technical information

- The global offering presented in this leaflet may not be available for all regions
- All combinations may not be configurable

Alfa Laval service offering

Our vision is to be your trusted partner for service, driving sustainable performance together. The Alfa Laval portfolio of service offers for Plate Heat Exchangers from start-up of your operations, through operation, process improvements, and replacement. Throughout the lifecycle, we bring you more than 140 years of technical experience and innovative service solutions tailored to your business needs. Easily accessible through our people all over the world.

For information about our complete service offering and how to contact us, please visit www.alfalaval.com/service.

Sustainability at Alfa Laval

At Alfa Laval we are committed to reaching net zero 2050 across our complete value chain. Our products and solutions support our customers to meet sustainability goals, boost circular business, and develop sustainable value chains. We are living our commitments by also setting clear targets to reach net zero emissions in our own operations and to reduce emissions upstream and downstream in our value chains. For more information about our sustainability journey and our sustainability targets aimed to drive efficiency and behavioural change to achieve better results in the short- and long term, please visit www.alfalaval.com/sustainability.

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

CHE00083-9-EN-GB

© Alfa Laval AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com